GE
Lighting Solutions

Installation Instructions

GT1™ Pedestrian 12" Incandescent Look Signal Modules

Overlay – Countdown – Full Hand – Full Person

BEFORE YOU BEGIN

Read these instructions completely and carefully.

Prepare Electrical Wiring

Electrical Requirements

- Do not use in wet locations
- Follow all National Electric Codes (NEC) and local codes.

⚠ WARNING / AVERTISSEMENT

Risk of Electric Shock. Disconnect Before Servicing or installing product.
Risque de choc électrique. Couper l'alimentation avant le dépannage ou avant l'installation du produit.

Installation Steps:

1. **Verify input voltage** is within specified range on the back of the LED signal module before installation. Failure to do so will cause lamp to fail.
2. Open front cover of (customer supplied) traffic signal housing.
3. Remove cable tie-wraps (qty. 2) from wire bundle.
4. Connect the wires to the appropriate terminal block within customer supplied signal housing.
   Orange wire → (+ for Hand)
   Blue wire → (+ for Person)
   White wire → (for the neutral)
5. Close front cover of (customer supplied) traffic signal housing ensuring that the module gasket is tight within the housing.

12 x 12 inch Overlay

12 x 12 inch Countdown

12 x 12 inch Full Hand/Person

Voltage Rating

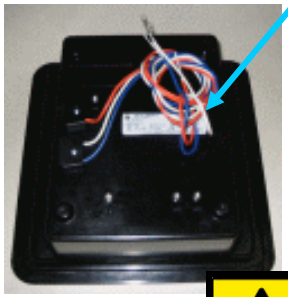

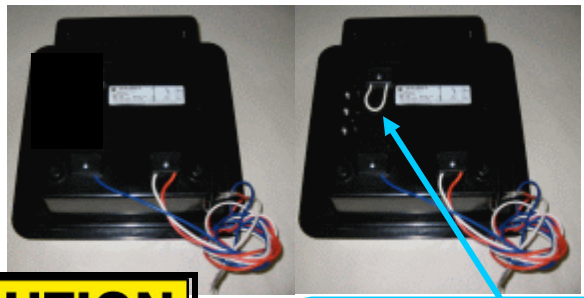

⚠ CAUTION

Risk of Electric Shock
Install unit in enclosure tested to be suitable for wet locations only.

Conversion to Half Cycle (if required)

1. Remove plastic end-cap.
2. Remove jumper wire from the unit
3. Put end-cap back on

GE Lighting Solutions • **1-888-MY-GE-LED** • www.gelightingsolutions.com
1-888-69-43-533

GE Lighting Solutions, LLC is a subsidiary of the General Electric Company. GT1 is a trademark of GE Lighting Solutions, LLC. The GE brand and logo are trademarks of the General Electric Company. © 2010 GE Lighting Solutions, LLC. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.